



NOTES:
1. SAW JOINTS 2" DEEP @ 10' MAX SPACING WITHIN 12 HRS OF PLACEMENT. FILL JOINT WITH SEALANT

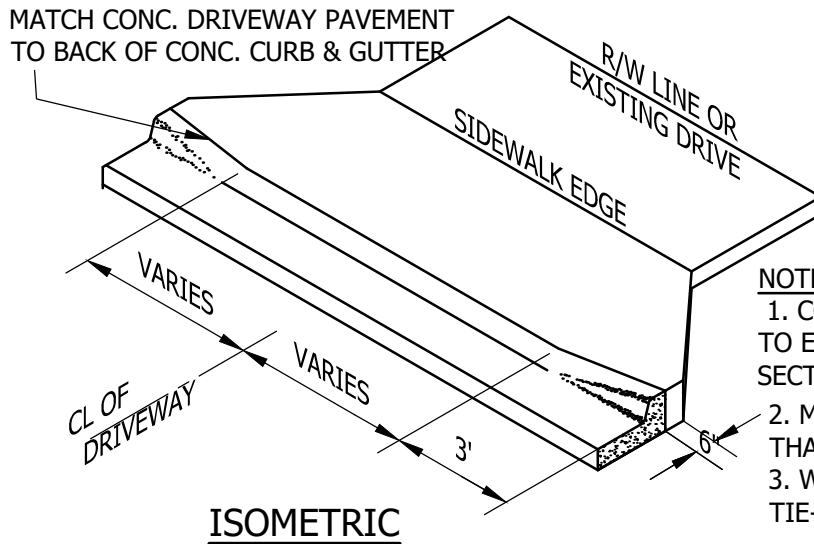

NOTES:
1. CONTROL JOINTS IN CONCRETE CURB NOT TO EXCEED 10' SPACING THROUGH DRIVEWAY SECTION.
2. MATCH EX. DRIVEWAY SECTION IF GREATER THAN SHOWN.
3. WHERE SIDEWALK IS NOT PRESENT 3:1 WING TIE-IN TO BE DETERMINED BY ENGINEER.

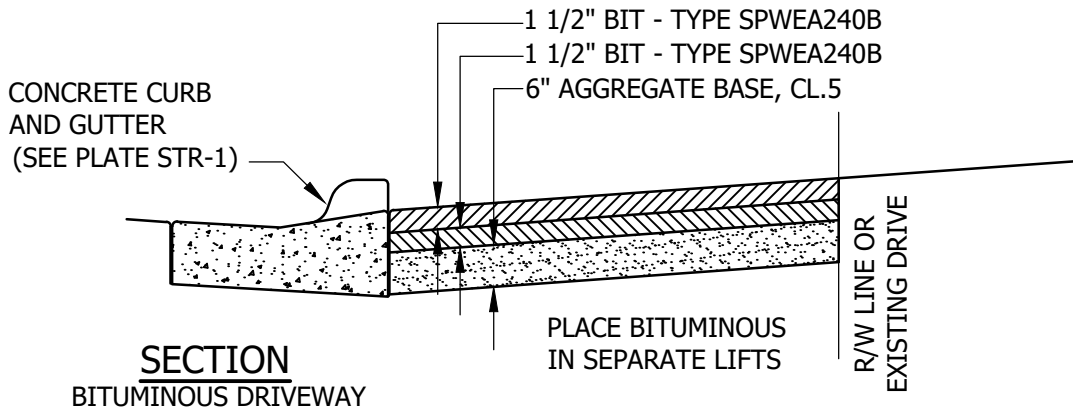

**RESIDENTIAL DRIVEWAY
OR ALLEY SECTION
(B618 CURB)**

LAST REVISION:
DEC 2018

PLATE NO.
STR-3